



- Features :
- Universal AC input / Full range
  - Built-in active PFC function, PF>0.95
  - High efficiency up to 89%
  - Withstand 300VAC surge input for 5 seconds
  - Protections: Short circuit / Overload / Over voltage / Over temperature
  - Built-in constant current limiting circuit
  - 1U low profile 41mm
  - Built-in cooling fan ON-OFF control
  - Built-in DC OK signal
  - Built-in remote ON-OFF control
  - Standby 5V@0.3A
  - Built-in remote sense function
  - No load power consumption<0.5W (Note.6)
  - 5 years warranty



**SPECIFICATION**



| MODEL                 | HRPG-300-3.3                         | HRPG-300-5  | HRPG-300-7.5 | HRPG-300-12  | HRPG-300-15  | HRPG-300-24                 | HRPG-300-36  | HRPG-300-48  |              |  |
|-----------------------|--------------------------------------|---|--------------|--------------|--------------|-----------------------------|--------------|--------------|--------------|--|
| OUTPUT                | DC VOLTAGE                           | 3.3V  | 5V           | 7.5V         | 12V          | 15V                         | 24V          | 36V          | 48V          |  |
|                       | RATED CURRENT                        | 60A   | 60A          | 40A          | 27A          | 22A                         | 14A          | 9A           | 7A           |  |
|                       | CURRENT RANGE                        | 0 ~ 60A   | 0 ~ 60A      | 0 ~ 40A      | 0 ~ 27A      | 0 ~ 22A                     | 0 ~ 14A      | 0 ~ 9A       | 0 ~ 7A       |  |
|                       | RATED POWER                          | 198W  | 300W         | 300W         | 324W         | 330W                        | 336W         | 324W         | 336W         |  |
|                       | RIPPLE & NOISE (max.) Note.2         | 80mVp-p   | 90mVp-p      | 100mVp-p     | 120mVp-p     | 150mVp-p                    | 150mVp-p     | 250mVp-p     | 250mVp-p     |  |
|                       | VOLTAGE ADJ. RANGE                   | 2.8 ~ 3.8V  | 4.3 ~ 5.8V   | 6.8 ~ 9V     | 10.2 ~ 13.8V | 13.5 ~ 18V                  | 21.6 ~ 28.8V | 28.8 ~ 39.6V | 40.8 ~ 55.2V |  |
|                       | VOLTAGE TOLERANCE Note.3             | ± 2.5%  | ± 2.0%       | ± 2.0%       | ± 1.0%       | ± 1.0%                      | ± 1.0%       | ± 1.0%       | ± 1.0%       |  |
|                       | LINE REGULATION                      | ± 0.5%  | ± 0.5%       | ± 0.5%       | ± 0.3%       | ± 0.3%                      | ± 0.2%       | ± 0.2%       | ± 0.2%       |  |
|                       | LOAD REGULATION                      | ± 1.0%  | ± 1.0%       | ± 1.0%       | ± 0.5%       | ± 0.5%                      | ± 0.5%       | ± 0.5%       | ± 0.5%       |  |
|                       | SETUP, RISE TIME                     | 1000ms, 50ms/230VAC 2500ms, 50ms/115VAC at full load  |              |              |              |                             |              |              |              |  |
| HOLD UP TIME (Typ.)   | 16ms/230VAC 16ms/115VAC at full load |   |              |              |              |                             |              |              |              |  |
| INPUT                 | VOLTAGE RANGE Note.5                 | 85 ~ 264VAC   |              | 120 ~ 370VDC |              |                             |              |              |              |  |
|                       | FREQUENCY RANGE                      | 47 ~ 63Hz   |              |              |              |                             |              |              |              |  |
|                       | POWER FACTOR (Typ.)                  | PF>0.95/230VAC  |              |              |              | PF>0.99/115VAC at full load |              |              |              |  |
|                       | EFFICIENCY (Typ.)                    | 80%   | 82%          | 86%          | 88%          | 88%                         | 87%          | 88%          | 89%          |  |
|                       | AC CURRENT (Typ.)                    | 3.5A/115VAC   |              | 1.8A/230VAC  |              |                             |              |              |              |  |
|                       | INRUSH CURRENT (Typ.)                | 35A/115VAC  |              | 70A/230VAC   |              |                             |              |              |              |  |
| LEAKAGE CURRENT       | <1.2mA / 240VAC                      |   |              |              |              |                             |              |              |              |  |
| PROTECTION            | OVERLOAD                             | 105 ~ 135% rated output power<br>Protection type : Constant current limiting, recovers automatically after fault condition is removed |              |              |              |                             |              |              |              |  |
|                       | OVER VOLTAGE                         | 3.96 ~ 4.62V  | 6 ~ 7V       | 9.4 ~ 10.9V  | 14.4 ~ 16.8V | 18.8 ~ 21.8V                | 30 ~ 34.8V   | 41.4 ~ 48.6V | 57.6 ~ 67.2V |  |
|                       | OVER TEMPERATURE                     | Shut down o/p voltage, recovers automatically after temperature goes down   |              |              |              |                             |              |              |              |  |
| FUNCTION              | 5V STANDBY                           | 5VSB : 5V@0.3A ; tolerance ±5%, ripple : 50mVp-p(max.)  |              |              |              |                             |              |              |              |  |
|                       | DC OK SIGNAL                         | PSU turns on : 3.3 ~ 5.6V ; PSU turns off : 0 ~ 1V  |              |              |              |                             |              |              |              |  |
|                       | REMOTE CONTROL                       | RC+ / RC- : 4 ~ 10V or open = power on ; 0 ~ 0.8V or short = power off  |              |              |              |                             |              |              |              |  |
|                       | FAN CONTROL (Typ.)                   | Load 35 ± 15% or RTH2 ≥ 50°C Fan on   |              |              |              |                             |              |              |              |  |
| ENVIRONMENT           | WORKING TEMP.                        | -40 ~ +70°C (Refer to "Derating Curve")   |              |              |              |                             |              |              |              |  |
|                       | WORKING HUMIDITY                     | 20 ~ 90% RH non-condensing  |              |              |              |                             |              |              |              |  |
|                       | STORAGE TEMP., HUMIDITY              | -40 ~ +85°C , 10 ~ 95% RH   |              |              |              |                             |              |              |              |  |
|                       | TEMP. COEFFICIENT                    | ± 0.03%/°C (0 ~ 50°C)   |              |              |              |                             |              |              |              |  |
|                       | VIBRATION                            | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes  |              |              |              |                             |              |              |              |  |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS                     | UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved  |              |              |              |                             |              |              |              |  |
|                       | WITHSTAND VOLTAGE                    | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC   |              |              |              |                             |              |              |              |  |
|                       | ISOLATION RESISTANCE                 | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |              |              |              |                             |              |              |              |  |
|                       | EMC EMISSION                         | Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020  |              |              |              |                             |              |              |              |  |
| OTHERS                | EMC IMMUNITY                         | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN61000-6-2, heavy industry level, criteria A, EAC TP TC 020       |              |              |              |                             |              |              |              |  |
|                       | MTBF                                 | 176K hrs min. MIL-HDBK-217F (25°C)  |              |              |              |                             |              |              |              |  |
|                       | DIMENSION                            | 199*105*41mm (L*W*H)  |              |              |              |                             |              |              |              |  |
|                       | PACKING                              | 0.95Kg;15pcs/15.3Kg/0.79CUFT  |              |              |              |                             |              |              |              |  |

**NOTE**

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm\*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <http://www.meanwell.com>)
5. Derating may be needed under low input voltages. Please check the derating curve for more details.
6. No load power consumption<0.5W when RC- & RC+ (CN100 pin4,6) 0 ~ 0.8V or short.
7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

### Mechanical Specification


Case No.980A Unit:mm

#### Terminal Pin No. Assignment


| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4,5     | DC OUTPUT -V |
| 2       | AC/N       | 6,7     | DC OUTPUT +V |
| 3       | FG         |         |              |

#### Connector Pin No. Assignment (CN100): HRS DF11-8DP-2DS or equivalent


| Pin No. | Assignment | Mating Housing                | Terminal                       |
|---------|------------|-------------------------------|--------------------------------|
| 1       | AUX        | HRS DF11-8DS<br>or equivalent | HRS DF11-**SC<br>or equivalent |
| 2       | AUXG       |                               |                                |
| 3       | DC-OK      |                               |                                |
| 4       | RC-        |                               |                                |
| 5       | GND        |                               |                                |
| 6       | RC+        |                               |                                |
| 7       | +S         |                               |                                |
| 8       | -S         |                               |                                |

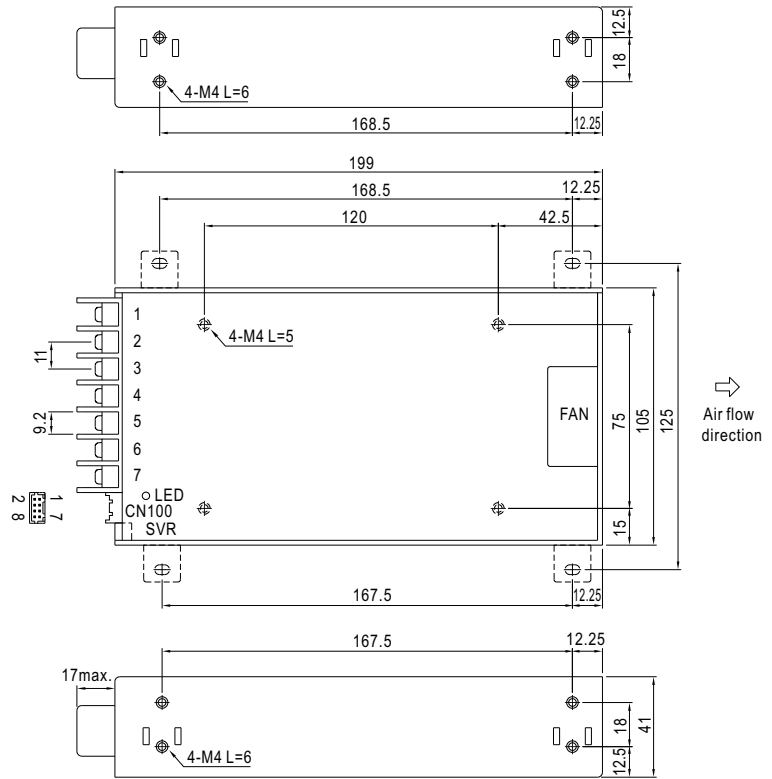


### Block Diagram

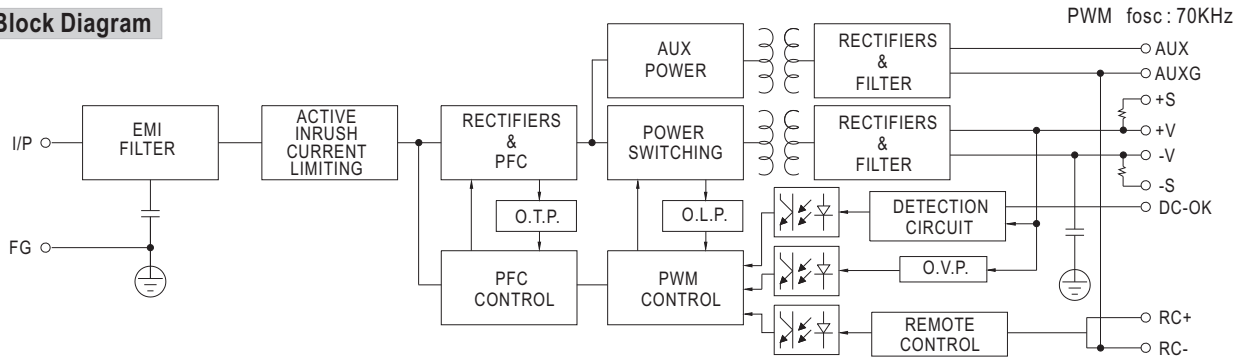

### Derating Curve

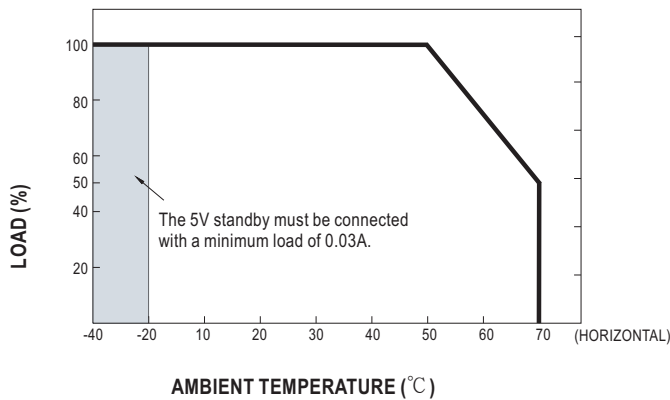

### Output Derating VS Input Voltage

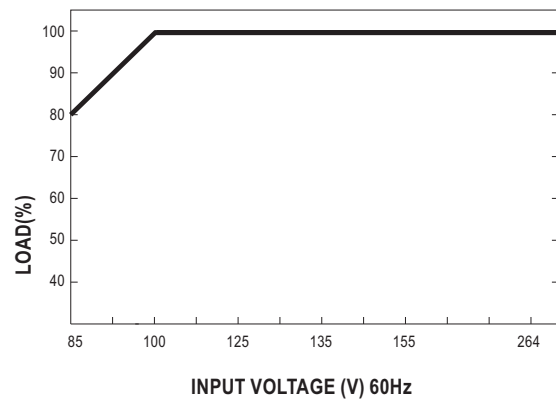


## Function Description of CN100

| Pin No. | Function | Description   |
|---------|----------|---|
| 1       | AUX      | Auxiliary voltage output, 4.75~5.25V, reference to pin 2(AUXG). The maximum load current is 0.3A. This output is not controlled by the "remote ON/OFF control".   |
| 2       | AUXG     | Auxiliary voltage output ground. The signal return is isolated from the output terminals (+V & -V).   |
| 3       | DC-OK    | DC-OK signal is a TTL level signal, referenced to pin5(DC-OK GND). High when PSU turns on.  |
| 4       | RC-      | Remote control ground.  |
| 5       | GND      | This pin connects to the negative terminal(-V). Return for DC-OK signal output.   |
| 6       | RC+      | Turns the output on and off by electrical or dry contact between pin 4 (RC-), Short: Power OFF, Open: Power ON.   |
| 7       | +S       | Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |
| 8       | -S       | Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |

## Function Manual

### 1.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5V.

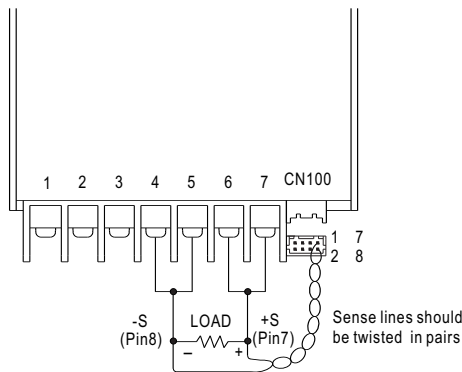


| CN100 |      |       |     |    |   |
|-------|------|-------|-----|----|---|
| 1     | AUX  | DC-OK | GND | +S | 7 |
| 2     | AUXG | RC-   | RC+ | -S | 8 |

Fig 1.1

### 2.DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

| Between DC-OK(pin3) and GND(pin5) | Output Status |
|-----------------------------------|---------------|
| 3.3 ~ 5.6V                        | ON            |
| 0 ~ 1V                            | OFF           |

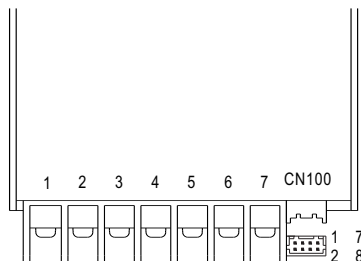

| CN100 |      |       |     |    |   |
|-------|------|-------|-----|----|---|
| 1     | AUX  | DC-OK | GND | +S | 7 |
| 2     | AUXG | RC-   | RC+ | -S | 8 |

Fig 2.1

### 3.Remote Control

The PSU can be turned ON/OFF by using the "Remote ON/OFF" function

| Between RC+(pin6) and RC-(pin4) | Output Status |
|---------------------------------|---------------|
| SW ON (Short)                   | OFF           |
| SW OFF (Open)                   | ON            |

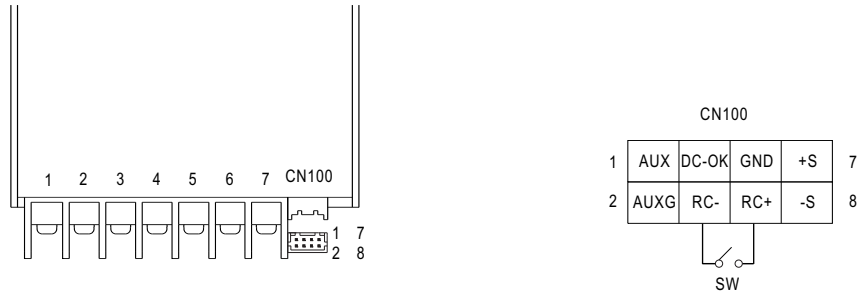


Fig 3.1